OWNER'S MANUAL



12V Battery TV Display Monitor



CAUTION
NAME AND FUNCTION OF EACH PARTS 6 Unit 6 Remote controller 7
HOW TO OPERATE THE MONITOR 8 Power ON/OFF 8 Monitor Angle Adjustment 8
PICTURE CONTROL 9 Auto picture control 9 Manual picture control 9
SCREEN MODE 10 Screen 10
SPECIFICATIONS
TERMS AND CONDITIONS OF WARRANTY

CAUTION

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Please read and observe all warnings and instructions in this owner's manual and those marked on the unit. Retain this booklet for future reference.

There are two kinds of alarm symbols as follows:



CAUTIO

G	The lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to	
	people.	l
N	The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.	

WARNING

Installation of all TV monitors must be out of the driver's field of sight.




Do not try and service these products yourself, seek only a qualified service center or factory sevice center.



Be careful not to drop or apply under pressure to the front panel of your video monitor. If the screen cracks due to misuse, your warranty will be void!



Be careful not to overload your cigarette lighter plug by adding



be occured.

Use only a damp cloth to clean the screen and use only purified water on the cloth, wring out all excess water prior to wiping the screen. Do not use any cleaners or chemicals to clean the screen. In most cases a dry cloth will do!

Do not mount the product where

it will obstruct the deployment of

the airbag or in an area where it

would affect the vehicular control. Also be careful to avoid mounting

the product where it can become hazardous during sudden stops or in the event of an accident.

Use extra caution with any liquids

in your car. If you or your child

pull your vehicle to the roadside

or wipe the products with a towel. Do not

operate the equipment until all liquids have

inspected at a service center by a qualified

technician. Severe harm or danger can

either evaporated or you have had the monitor

spill any liquid on these products,

and turn the key off to disconnect





Quality installations are best performed by qualified and certified installers.



CAUTION

Watching the monitor for an extended period of time without the engine running may deplete the vehicle's battery charge.



Don't touch the unit there is a flash of lightning. It may receive an electric shock.



This product is designed for operation with a 12 Volt DC, negative ground vehicle. It is not suitable for operation under other conditions or voltages.



Do not cover or stop up heater ducts or vents. It may be the origin of a fire or receives an electric shock.



Do not bring magnetic devices such as credit card or magnetic card near the magnets.


Check Point R

- 1. The operating temperature of this product is limited to -10° $\sim +60^{\circ}$. Non-operating temperature of this product is -10° ~ $+80^{\circ}$ C.
- 2. From time to time when your vehicle is extremely hot or cold you must allow time for your air conditioner or heater to cool or heat the vehicle and for operating temperatures to return to normal operating ranges. Your monitor will return to its normal functions when these operating ranges are achieved.
- 3. Your optimum picture quality is achieved when you are directly in front of the monitor (+/-30 degrees).



Unit


6

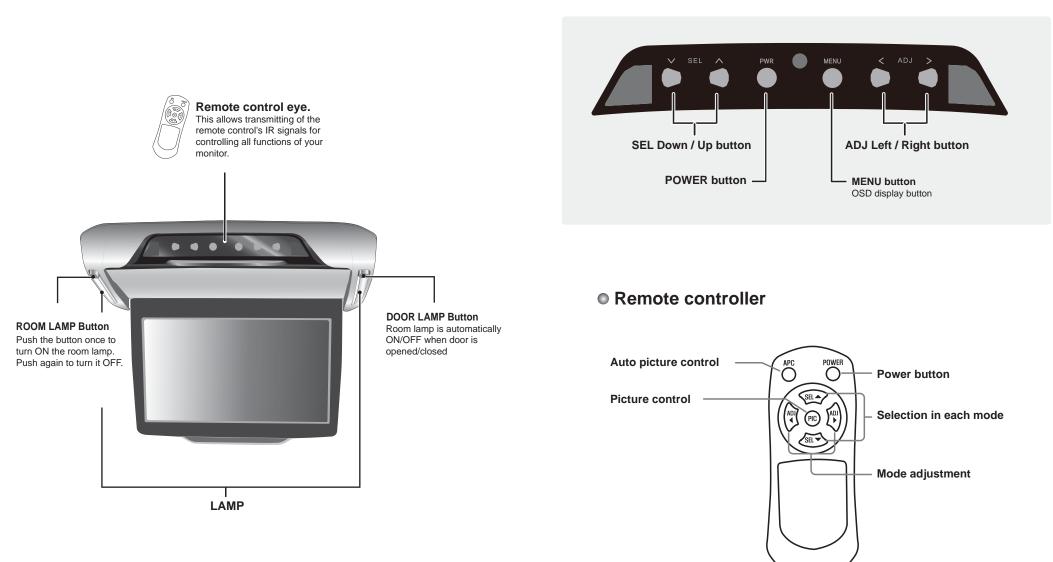



Power ON/OFF


- 1. Connect the monitor to external devices.
- Press the **POWER** button on either the remote controller or the unit once to turn the power on.
 Press the same **POWER** button to turn the power off.



3. Power on the external devices and play.

Monitor Angle Adjustment

You can pull down the monitor manually and also adjust the viewing angle.








Auto picture control



Press this button to change picture mode. When you press this **APC** button, Picture mode will be changed as follows;



Manual picture control

CONTRAST/BRIGHT/COLOR/TINT and change the picture setting to user's preference.


 Bring up the on-screen PICTURE menu by pressing the PIC button on the remote controller or the MENU button on the unit.

PICTURE		
Contrast	88	
🔅 Bright	87	
Color	70	
💩 Tint	50	
، 🗁 Screen	Wide	

 Select Contrast/Bright/Color/Tint by pressing the SELV/A button on the remote controller or on the unit.

PICTU	RE
Contrast	88
🔅 Bright	87
Color	70
💩 Tint	50
· 🗁 Screen	Wide

Select the desired mode pressing the ADJ </ >
 buttons on the remote controller or on the unit.





Screen

Select the desired screen modes as your taste.

 Bring up the on-screen PICTURE menu by pressing the PIC button on the remote controller or the MENU button on the unit.

PICTU	RE
Contrast	88
🔅 Bright	87
Color	70
💩 Tint	50
Creen	Wide

 Select Screen menu by pressing the SELV/A button on the remote controller or on the unit.

E
88
87
70
50
Wide

3. Select the desired mode pressing the ADJ </ > buttons on the remote controller or on the unit.

PICTURE	
Contrast	88
🔅 Bright	87
Color	70
💩 Tint	50
、🗁 Screen	Normal

SPECIFICATIONS

Power	DC 12V
Screen Format	16 : 9
Screen Resolution	1024 X 600 (WSVGA)
Color System	NTSC / PAL Auto Selection
Video Input	1 EA
Remote Control	Yes
Dimension	12.4"(W) X 9"(D) X 1.7"(H) / 316(W) X 230(D) X 45(H)mm

Note : This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

* Each Modes will be displayed as below;

NORMAL



The screen will be viewing at standard 4:3 ratio.



The screen will be to viewing at magnified 16 : 9 ratio.



TERMS AND CONDITIONS OF WARRANTY

For systems purchased and installed AFTER vehicle registration, warranty is limited to 3 years or 100,000Km Whichever is earlier from the date of installation.

This Warranty is subjected to the following terms and conditions:

- 1. All servicing and repairing, if any, shall be carried out by TCEAS, TCAT and its authorised workshops or service outlets.
- 2. Any warranty service or repairing will be done upon presentation of a valid warranty book duly stamped or signed by any authorised Tan Chong Representative.
- This warranty does not cover any damage caused by improper or negligent use, accident, Acts of God, alterations or repair by unauthorised party or parties, hence no claims shall be entertained by TC AUTO TOOLING SDN, BHD(TCAT).
- This warranty does not cover the cost of accidents, theft or fire caused indirectly by the system, In such cases, TCAT shall not be held accountable.
- 5. Warranty shall be void if the serial number sticker on the system is removed or defaced or in the opinion of TCAT that it has been tampered with.
- 6. This warranty shall be limited only to the cost of repair or replacement of the defective parts and shall not cover any other such incidental costs incurred to the user.

Owner's Name :	Vehicle Registration NO.
Tel No.	

Owner's Address:	Delivery Date :
Vehicle Model:	Chassis No:
Engine No :	Serial No :

Selling Branch or Dealer's Name and Address (chop and sign)

I have clearly understood and accepted the terms and conditions of this warranty for the purchase of this system and i hereby confirm the system as delivered to me is in good condition.

Date:

Signature: